



Installation instructions for large top cap

The **large top cap** can be used for waterproofing membranes up to a material thickness of 2.5 mm. For thinner waterproofing membranes (e.g. membrane thickness 1.8 mm), the attached spacer strip must be glued in the top cap on site according to the installation instruction if required (see figure below).

Installation instructions for large top cap

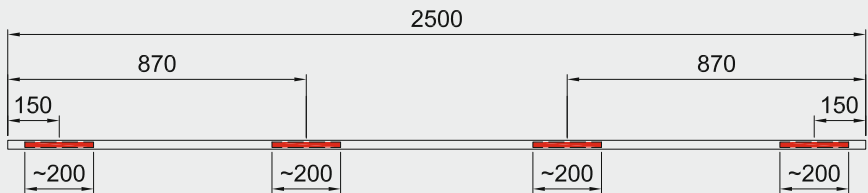

If required, the spacer strip
needs to be glued inside the
top cap.